

# 10Gbps BiDi SFP+ 1270nm/1330nm 60km Transceiver

## Product Features

- Up to 10Gbps data links
- 60Km with 9/125μm SMF \*1
- WDM TX1270nm/RX1330nm DFB/APD laser
- Simplex LC Connector
- Hot-pluggable SFP+ footprint
- Single 3.3V power supply
- Operating temperature: 0°C to 70°C
- RoHS
- Digital Diagnostic Monitor (DDM)



## Applications

- 10GBase Ethernet
- 10G FC

## 1. Description

The SFP-10G-BX23-60 is a 10Gbps enhanced small form factor pluggable SFP+ transceiver compatible with 10GBASE Ethernet and 10G Fiber Channel. It is suitable for single-mode fiber (SMF) communications in 10Gbps Ethernet and 10G Fiber Channel by single fiber.

## 2. Regulatory Compliance

Connlight transceivers are Class 1 Laser Products comply with FDA regulations. Meet Class 1 eye safety requirements of EN 60825 and the electrical safety requirements of EN 60950.

### 3. Absolute Maximum Ratings

| Parameter                  | Symbol          | Min. | Max. | Unit |
|----------------------------|-----------------|------|------|------|
| Supply Voltage             | V <sub>CC</sub> | -0.5 | 4    | V    |
| Storage Temperature        | T <sub>s</sub>  | -40  | 85   | °C   |
| Operating Case Temperature | T <sub>c</sub>  | 0    | 70   | °C   |

### 4. Recommended Operating Conditions

| Parameter                      | Symbol           | Min. | Typical | Max. | Unit |
|--------------------------------|------------------|------|---------|------|------|
| Operating Case Temperature     | T <sub>c</sub>   | 0    |         | 70   | °C   |
| Power Supply Voltage           | V <sub>CC</sub>  | 3.15 | 3.3     | 3.45 | V    |
| Power Supply Current           | I <sub>CC</sub>  |      |         | 300  | mA   |
| Data Rate                      |                  |      | 10      |      | GBps |
| Max Link Length on 9/125μm SMF | L <sub>max</sub> |      |         | 60   | km   |

### 5. Optical Characteristics


| Parameter                               | Symbol           | Min. | Typical | Max. | Unit |
|-----------------------------------------|------------------|------|---------|------|------|
| <b>Transmitter</b>                      |                  |      |         |      |      |
| Centre Wavelength                       | λ <sub>c</sub>   | 1260 | 1270    | 1280 | nm   |
| Spectral Width (-20dB)                  | σ                |      |         | 1    | nm   |
| Average Output Power                    | P <sub>out</sub> | 1    |         | 5    | dBm  |
| Extinction Ratio                        | ER               | 3.5  |         |      | dB   |
| Average Launch Power of Off Transmitter | P <sub>off</sub> |      |         | -30  | dBm  |
| <b>Receiver</b>                         |                  |      |         |      |      |
| Centre Wavelength                       | λ <sub>c</sub>   | 1320 | 1330    | 1340 | nm   |
| Receiver Sensitivity                    | P <sub>IN</sub>  |      |         | -20  | dBm  |
| Receiver Overload                       | P <sub>max</sub> | -7   |         |      | dBm  |
| LOS De-Assert                           | LOS <sub>D</sub> |      |         | -22  | dBm  |
| LOS Assert                              | LOS <sub>A</sub> | -24  |         |      | dBm  |
| LOS Hysteresis                          |                  | 0.5  |         | 4.5  | dB   |

### 6. Electrical Characteristics

| Parameter                     | Symbol          | Min. | Typical | Max.            | Unit |
|-------------------------------|-----------------|------|---------|-----------------|------|
| <b>Transmitter</b>            |                 |      |         |                 |      |
| Input Differential Impedance  | Z <sub>in</sub> | 90   | 100     | 110             | Ω    |
| Data Input Swing Differential | V <sub>in</sub> | 250  |         | 1200            | mV   |
| Tx-Dis Disable                | V <sub>d</sub>  | 2.0  |         | V <sub>CC</sub> | V    |
| Tx-Dis Enable                 | V <sub>en</sub> | 0    |         | 0.8             | V    |
| <b>Receiver</b>               |                 |      |         |                 |      |

|                                |        |     |  |         |    |
|--------------------------------|--------|-----|--|---------|----|
| Data Output Swing Differential | Vout   | 250 |  | 800     | mV |
| Rx-Los Fault                   | Vlf    | 2.0 |  | VccHOST | V  |
| Rx-Los Normal                  | Vln    | 0   |  | 0+0.8   | V  |
| Output rise and fall time      | Tr, Tf | 30  |  |         | ps |

## 7. Pin Descriptions

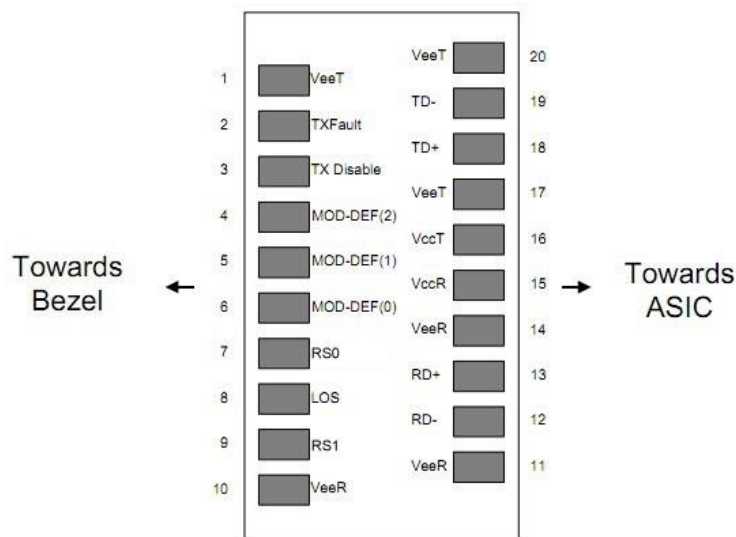

**Diagram of Host Board Connector Block Pin Numbers and Names**

| Pin | Symbol     | Description                                                                                                                               | Ref. |
|-----|------------|-------------------------------------------------------------------------------------------------------------------------------------------|------|
| 1   | VEET       | Transmitter Ground (Common with Receiver Ground)                                                                                          | 7.1  |
| 2   | TFAULT     | Transmitter Fault. Not supported.                                                                                                         |      |
| 3   | TDIS       | Transmitter Disable. Laser output disabled on high or open.                                                                               | 7.2  |
| 4   | MOD_DEF(2) | Module Definition 2. Data line for Serial ID.                                                                                             | 7.3  |
| 5   | MOD_DEF(1) | Module Definition 1. Clock line for Serial ID.                                                                                            | 7.3  |
| 6   | MOD_DEF(0) | Module Definition 0. Grounded within the module.                                                                                          | 7.3  |
| 7   | RS0        | Rate Select0, optionally controls SFP+ module receiver. When high input signaling rate>4.25 GBd and when low input signaling rate<4.25GBd |      |
| 8   | LOS        | Loss of Signal indication. Logic 0 indicates normal operation.                                                                            | 7.4  |
| 9   | RS1        | Rate Select1, optionally controls SFP+ module receiver. When high input signaling rate>4.25 GBd and when low input signaling rate<4.25GBd |      |
| 10  | VEER       | Receiver Ground (Common with Transmitter Ground)                                                                                          | 7.1  |
| 11  | VEER       | Receiver Ground (Common with Transmitter Ground)                                                                                          | 7.1  |
| 12  | RD-        | Receiver Inverted DATA out. AC Coupled.                                                                                                   |      |
| 13  | RD+        | Receiver Non-inverted DATA out. AC Coupled.                                                                                               |      |
| 14  | VEER       | Receiver Ground (Common with Transmitter Ground)                                                                                          | 7.1  |
| 15  | VCCR       | Receiver Power Supply                                                                                                                     |      |
| 16  | VCCT       | Transmitter Power Supply                                                                                                                  |      |

|    |      |                                                  |     |
|----|------|--------------------------------------------------|-----|
| 17 | VEET | Transmitter Ground (Common with Receiver Ground) | 7.1 |
| 18 | TD+  | Transmitter Non-Inverted DATA in. AC Coupled.    |     |
| 19 | TD-  | Transmitter Inverted DATA in. AC Coupled.        |     |
| 20 | VEET | Transmitter Ground (Common with Receiver Ground) | 7.1 |

#### Notes:

7.1 Circuit ground is internally isolated from chassis ground.

7.2 Laser output disabled on TDIS >2.0V or open, enabled on TDIS <0.8V.

7.3 Should be pulled up with 4.7k - 10kohms on host board to a voltage between 2.0V and 3.6V. MOD\_DEF(0) pulls line low to indicate module is plugged in.

7.4 LOS is open collector output. Should be pulled up with 4.7k -10kohms on host board to a voltage between 2.0V and 3.6V. Logic 0 indicates normal operation; logic 1 indicates loss of signal.

## 8. EEPROM & DDM THRESHOLD

### 8.1 EEPROM


#### 2 wire address 1010000X (A0h)

|                                         |
|-----------------------------------------|
| 0~95                                    |
| Serial ID Defined by SFP MSA (96 bytes) |
| 96~127                                  |
| Vendor Speific (32 bytes)               |
| 128~255                                 |
| Reserved (128 bytes)                    |

### 8.2 DDM THRESHOLD

|             | Low Alarm | Low Warn | High Warn | High Alarm |
|-------------|-----------|----------|-----------|------------|
| Temperature | -5°C      | 0°C      | 70°C      | 75°C       |
| Voltage     | 2.9V      | 3V       | 3.6V      | 3.7V       |
| Tx Bias     | 15mA      | 20mA     | 80mA      | 85mA       |
| Tx Power    | -3dBm     | -2dBm    | 5dBm      | 6dBm       |
| Rx Power    | -26dBm    | -25dBm   | -8dBm     | -7dBm      |

## 9. Mechanical Specifications

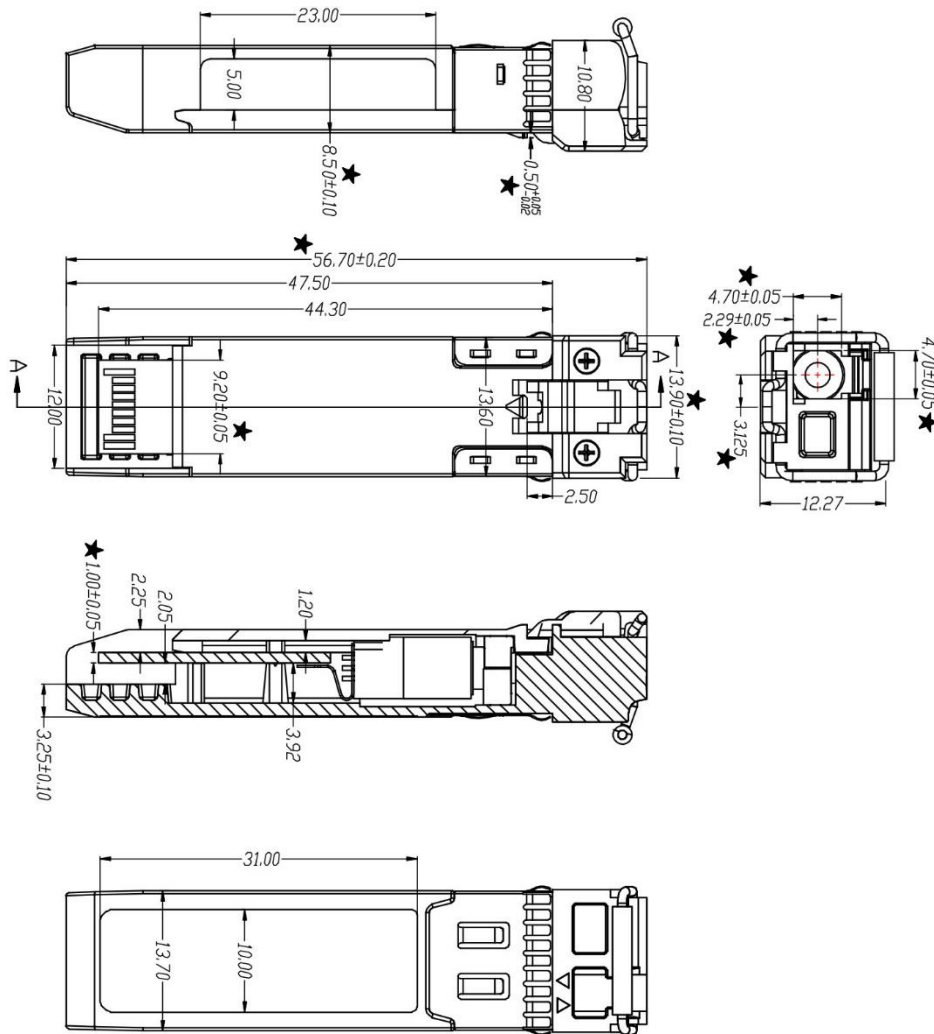

## Ordering Information

| Part No.        | Laser   | Distance | Temp.  | Optical Interface |
|-----------------|---------|----------|--------|-------------------|
| SFP-10G-BX23-60 | DFB/APD | 60km     | 0~70°C | Simplex LC        |

### NOTICE:

Connlight reserves the right to make changes to this product in this specification without notice, in order to improve product performance.